

SunMaxx™

Evacuated Tube Heat Pipe Solar Collectors



SunMaxx evacuated tube heat pipe solar collectors represent a new standard in solar energy technology. Combining cutting-edge performance and efficiency with highly competitive pricing, SunMaxx is the leader in offering renewable energy solutions to home and business owners.


Through numerous design innovations, SunMaxx ensures that each customer receives the best solar thermal product possible. Evacuated tube collectors use a vacuum space within each tube's borosilicate glass shell to offer unsurpassed efficiency and heat loss protection in any climate. In the event of a tube breaking, it can be removed and the entire system will continue to function, ensuring a heating source that will not fail.

There are four unique heat pipe evacuated tube models; the SunMaxx-10 (10 tubes), SunMaxx-20 (20 tubes), SunMaxx-25 (25 tubes) and the SunMaxx-30 (30 tubes). These configurations allow SunMaxx solar collectors to be sized for any solar heating application, including residential, commercial, municipal, agricultural and industrial systems.

SunMaxx solar collectors are independently tested and certified by the world's leading solar energy authorities to ensure that each product is a global leader in reliability, heat output, and return on investment.

Features:

- Ultra-high performance evacuated tube solar collector
- Industry's lowest \$/BTU
- SRCC certified
- Solar Keymark certified
- 10 year warranty available
- Multiple mounting and installation options




Technical Specifications & Features

Series Specifications

Tube Length	70"
Outer Tube Diameter	2.2"
Inner Tube Diameter	2.1"
Tube Thickness	0.1"
Tube Material	Borosilicate Glass
Tube Coating	Al - N/Al
Thermal Expansion	3.3×10^{-6}
Absorption Efficiency	> 92%
Emittance	< 8%
Vacuum	$P < 5 \times 10^{-3}$ Pa
Heat Loss	< 0.7 W/m ² C
Maximum Strength	1.0 MPa
Stagnation Temperature	> 428 °F
Flow Rate	0.028 GPM/tube
Fittings	1" NPT
Warranty	10 Years
Warranty (if not installed by a SunMaxx Certified Installer)	3 Years
Expected Lifetime	25 - 30 Years
Manufacturer	Silicon Solar Inc

Collector Specifications

Model	SuMaxx-10	SuMaxx-20	SuMaxx-25	SuMaxx-30
# of Tubes	10	20	25	30
Dimensions (inches)	36 x 79	68 x 79	85 x 79	101 x 79
Weight (lbs)	88	170	212	252
Net Aperture Area (ft ²)	10.01	20.03	25.03	30.04
Storage Tank Size (G)	30 - 40	50 - 60	60 - 70	70+
Nominal Flow Rate (G/min)	0.28	0.56	0.70	0.84

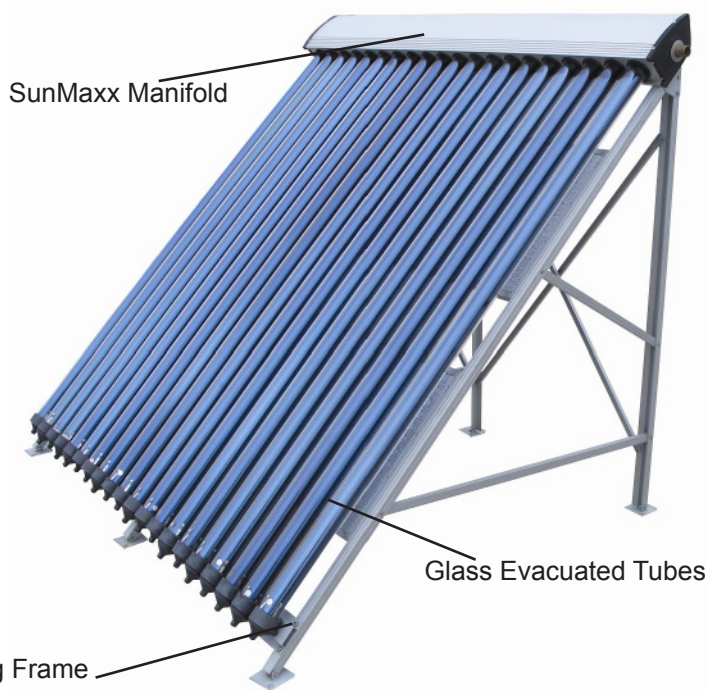

Performance Specifications

City	SunMaxx-10	SunMaxx-20	SunMaxx-25	SunMaxx-30
	BTU/yr	BTU/yr	BTU/yr	BTU/yr
New York	2,250,000	4,500,000	5,620,000	6,750,000
Philadelphia	2,440,000	4,880,000	6,100,000	7,320,000
Miami	4,050,000	8,100,000	10,100,000	12,150,000
Chicago	2,360,000	4,720,000	5,800,000	7,080,000
Denver	2,890,000	5,760,000	7,220,000	8,670,000
Los Angeles	2,250,000	4,500,000	5,620,000	6,750,000

2917 State Hwy 7, Bainbridge, NY 13733
 P: 888.SOLAR11 (Integrated Products)
 P: 877.SUNMAXX (Solar Thermal)
 www.siliconsolar.com | www.sunmaxxsolar.com

© 2008 Silicon Solar Inc - All Rights Reserved | shw-pcs-001 | last revised: 11/2008

In order to maintain the highest standards of service and knowledge of the latest solar technologies, Silicon Solar is a proud member of:

